


Data Sheet

| | | |
|---------------------------------|---------------------|------|
| Type | SR41SW | |
| System | Zinc / Silver Oxide | |
| Nominal Voltage / V | 1.55 | |
| Nominal Capacity / mAh | 45 | |
| Nominal Discharge Current / mA* | 0.08 | |
| Temperature Ranges / °C | min. | max. |
| Operating | -10 | +60 |
| Weight / g | 0.7 | |
| Dimensions /mm | | |
| Diameter | 7.9 | |
| Height | 3.6 | |
| Negative Cap Diameter | (3.9) | |
| Shoulder Height | (3.05) | |

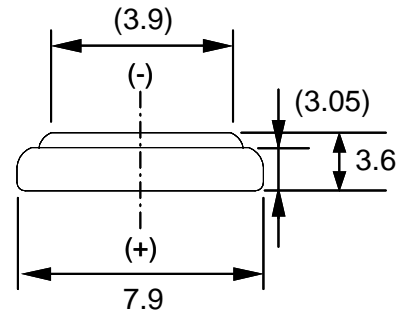

Typical Capacities (at 20°C)

| Discharge Type | Load [Ohm] | Duration [hr] | End Voltage [V] |
|--------------------------------------|------------|---------------|-----------------|
| Continuous (24hours/day, 7days/week) | 18 | 520 | 1.2 |

Main Applications

watches (low drain type)

*Typical capacity indicates duration until the voltage drops down to 1.2V when discharged at a nominal discharge current at 20°C.